


# ***STORM***

TECHNICAL SERVICES FOR  
EVENTS, THEATRE, MUSIC, FILM & TV

01483 757 211  
HIRE@STORMLTD.CO.UK  
WWW.STORMLTD.CO.UK

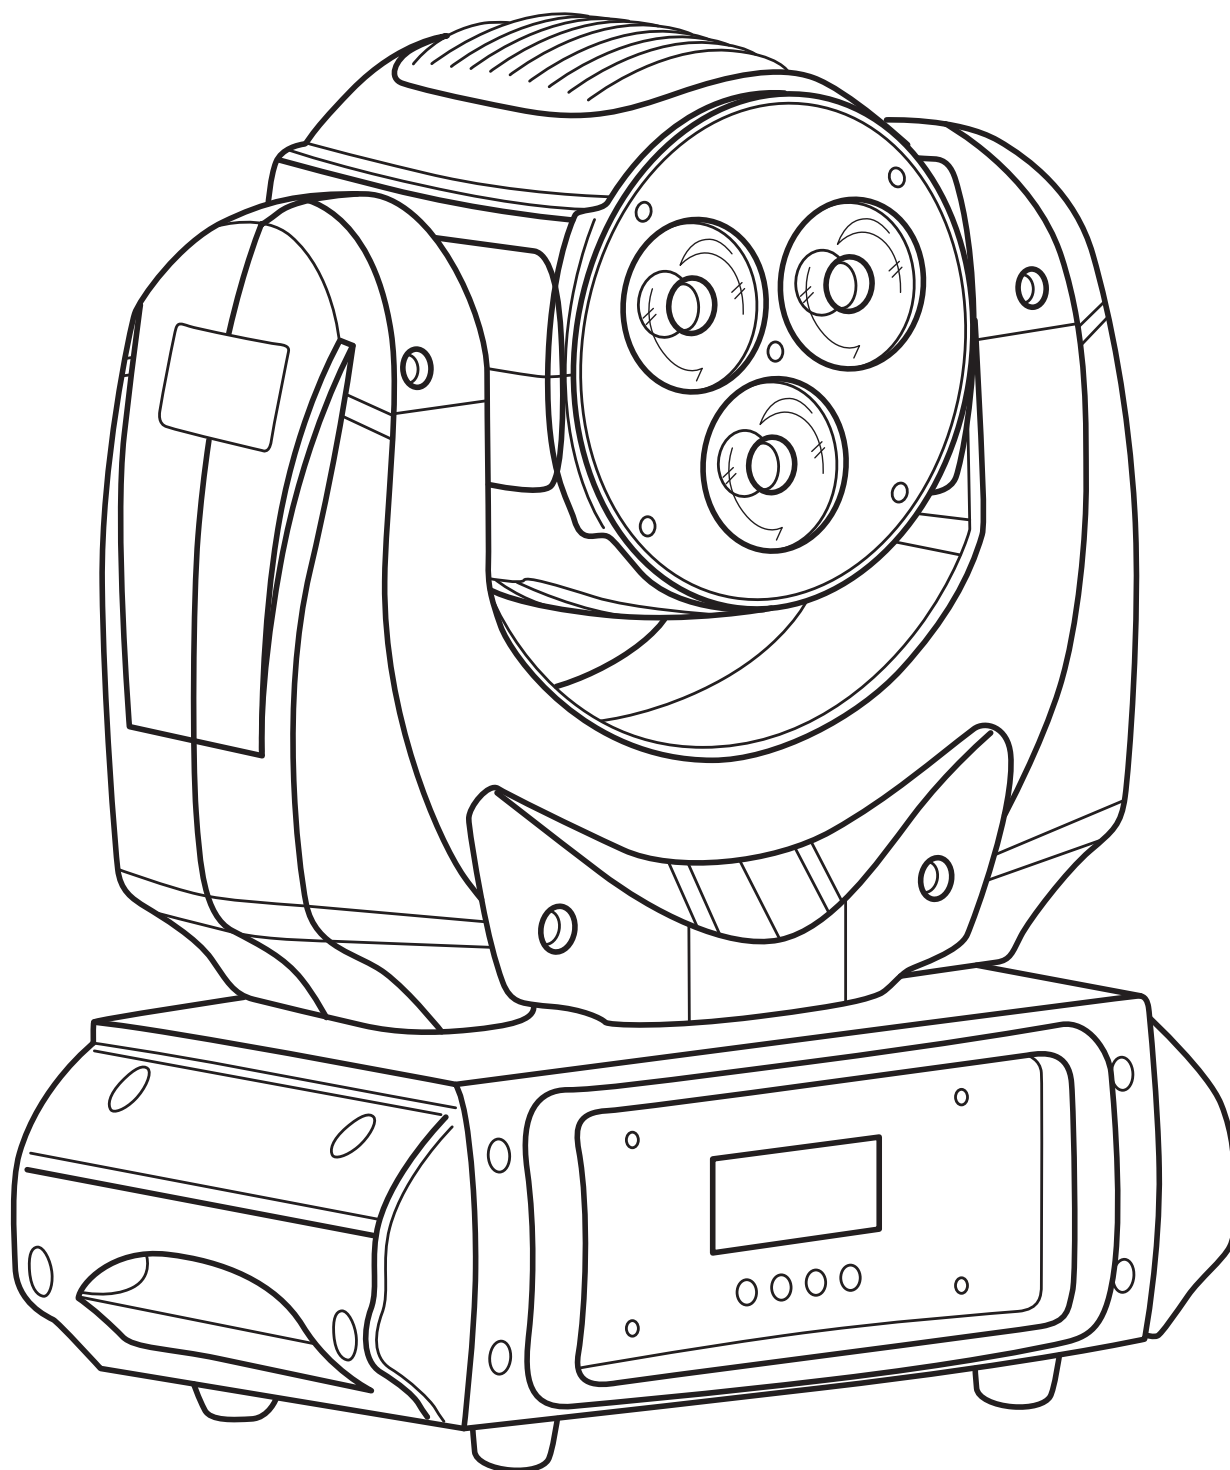

Owner Handbook

# Neptune Tumbler<sup>TM</sup>

---



## USE & MAINTENANCE

**YOU MUST READ THESE WARNINGS** carefully because they include important safety information about the installation, operation and maintenance of this product. Follow all instructions to maintain Manufacturer Warranty and for your own safety.

- Read all instructions in this User Manual and on the product carefully **BEFORE** operating this device.
- The latest version of this handbook can be found at [www.lantalighting.com](http://www.lantalighting.com)
- All Lanta products can be used for indoor use. Under no circumstances must these products be used outdoors unless stated otherwise.
- To prevent risk of fire or shock, do not expose products to rain or moisture.
- Make sure there are no flammable materials close to the unit during operation.
- Clean the product with a clean and dry, non-abrasive cloth. Do not use solvents or liquids to clean the product.
- There are no user replacement parts inside the product. Do not open the product for any reason. This will invalidate your Manufacturer Warranty and may impair the safety features of the product.
- Do not use if the product if you suspect it has been damaged in any way, including being dropped, is malfunctioning, or has been exposed to liquids or moisture. The unit must be repaired by an authorised service centre only. Manufacturer Warranty is void if unit is opened or adapted in any way. Operator safety may be compromised if this product is not operated and maintained in accordance with the details contained in this Owner Handbook.
- This appliance must be earthed. Do not remove the earth connection in the plug or any other location - it is essential for user safety.
- Power connection to the product is via a UK 240 Volt AC three-pin mains plug. Do not remove or adapt this plug. If necessary, only replace the plug top fuse with one of the same type, size and value.
- Be aware that products are mains powered and may be capable of producing high voltages from its outputs and has mains voltages inside the cabinet.

## MAINS WARNINGS

- Always make sure that the mains voltage you intend to use is within the operating range of the product.
- Always unplug product from the mains supply before moving, cleaning etc.
- Make sure you replace the fuse with another of the same type and rating.
- This product will be irrevocably damaged and the warranty invalidated if connected to a power pack or other dimmer.
- Make sure the mains cable is not crushed or damaged.
- Never disconnect the mains lead by pulling or tugging on the cable.
- This appliance must be earthed. Do not remove the earth connection in the plug or any other location - it is essential for user safety.
- Unplug the product from the mains during lightning storms or periods of mains fluctuations. If the product is going to be unused for long periods, unplug from the mains.

## PHYSICAL WARNINGS

- Always secure the product to a fastening device using a safety chain.
- If the product appears to be malfunctioning or operating in an unexpected manner, stop using the unit immediately and contact your supplier.
- Never lift, move or carry the product by any other means other than the case as a whole or handle if provided.

## LASER WARNINGS - WHERE APPLICABLE

- Lasers are hazardous devices. Permanent eye injury and blindness is possible if lasers are used incorrectly.
- Avoid direct eye contact with laser light.
- Never intentionally expose your eyes or others to direct laser light.
- This laser product can potentially cause instant eye injury or blindness if laser light directly strikes the eyes.

- It is illegal and dangerous to shine a laser into audience areas, where the audience or other personnel could get direct laser beams or bright reflections into their eyes.
- It is illegal to shine any laser at aircraft.
- Never leave this device running unattended.

## NON INTERLOCKING HOUSING WARNINGS

- This unit contains hazardous voltages, moving parts and high power laser emitters.
- Do not open the laser housing to avoid potential exposure to unsafe levels of laser radiation.
- The laser power levels, accessible if the unit is opened, can cause instant blindness, skin burns, and fires.

## LASER SAFETY NOTES - WHERE APPLICABLE


### YOU MUST READ THIS LASER SAFETY INFORMATION

Laser light is many thousands of times more concentrated than light from any other kind of light source and as so it poses a real danger to the sight. This concentration of light can cause instant eye injuries, primarily by burning the light sensitive portion at the back of the eye called the retina. Even if you cannot feel "heat" from a laser beam, it can still potentially injure or blind you or your audience. Even very small amounts of laser light are potentially hazardous even at long distances.

### Laser eye injuries can happen quicker than you can blink.

- Entertainment products split the laser beam into hundreds of smaller laser beams that are radiated out at high speed. There is a misconception that an individual laser beam is safe for eye exposure. This is not the case. This product produces high levels of laser power - classified as Class 3B - before it splits into multiple beams - defined as Class 3R levels. Many of the individual beams are potentially hazardous to the eyes and should never be directed into an audience at any time.
- Do not assume that because the laser light is moving, it is safe. It isn't, and because these beams are being moved by a mechanical device, it is possible for that device to stop moving and then direct the laser beam constantly at an individual. Since eye injuries can occur instantly, it is critical to prevent the possibility of any direct eye exposure.
- It is illegal to aim a Class 3R laser into an area where people could be exposed, even below people's eye level.
- Always install a laser effect to ensure that the entire laser light radiation is at least 3 meters above the floor on which people can stand. It is very important to test the laser before any public use.
- Do not use if any defect is detected such as if the product emits only one or two laser beams rather than the expected quantities as this could indicate damage to the product and could allow emission of higher laser levels above Class 3R.
- Do not point lasers at any reflective surfaces such as windows, mirrors and metal truss or other reflective fixtures as even laser reflections can be hazardous.
- The operation of a class 3R laser show is only allowed if the show is controlled by a skilled and well-trained operator, familiar with the data included in this manual.
- The law is updated from time to time and it is the users sole responsibility to understand the legal obligations and responsibilities in force at the time and location of use.

We recommend visiting the Government Health & Safety website <http://www.hse.gov.uk> or search for "Controlling the radiation safety of display laser installations" for further information.

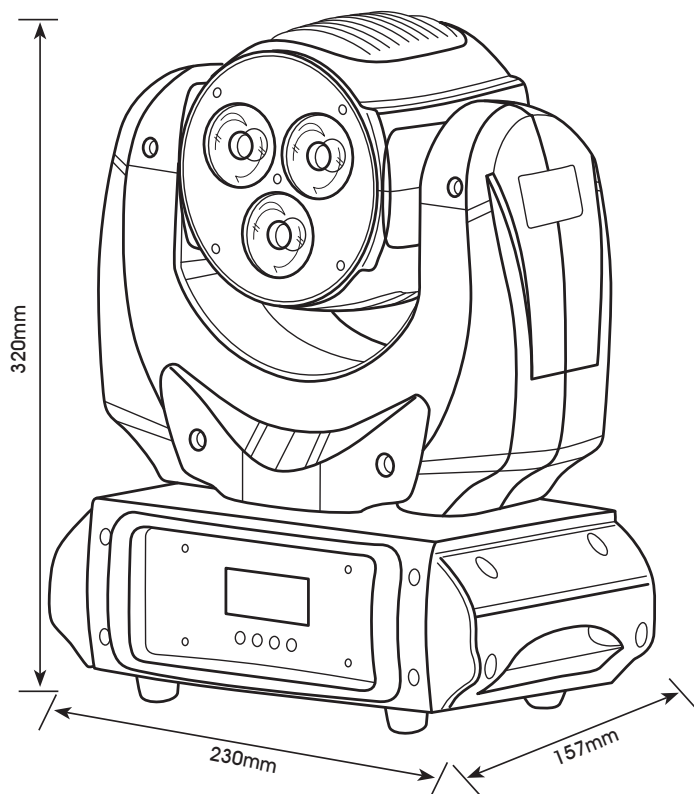

### INSIDE THE BOX

- 1 x Neptune Tumbler™
- IEC Power Cable
- IP Rated DMX Cable

### SPECIFICATIONS

Model Number	L39869
Light Source	6 x 10W Quad (RGBW) LEDs
Beam Angle	8°
Control	9 & 19 Channel DMX 512 control channels, LED display
Control Connections	3 Pin Female XLR, 3 Pin Male XLR IEC IN & OUT
Run Modes	Auto, DMX, Static Colour, Sound Active Built in Program, Master Slave
Power Requirement	240V AC 50/60Hz
Power Consumption	77w
Dimensions (mm)	230 x 157 x 320
Weight (kg)	4.7

### INTRODUCTION

Congratulations on your purchase of a Lanta Lighting Product. Based in the UK, Lanta are committed to providing high quality products at cost-effective prices to the professional lighting market. Since the first product was launched in 2006, Lanta has established a reputation for reliability, common sense design and customer support that has become the envy of others.

Other Lanta Lighting range include:

#### Professional Lighting:

From washes to floods, spots to projectors, LED technology now outperforms traditional lights while at the same time requiring significantly lower power and generating far less unwanted heat.

#### Performance Lasers:

Recent advances have reduced the costs of Lasers, made them more portable and brought improved performance and reliability. With step and animation lasers in multi and single colour formats for mobile DJs and static installs, Lanta promise Lasers that won't burn a hole in your pocket.

#### Atmospheric Effects:

When you need special atmospheric effects, Lanta have everything from bubble machines to fake snow, hazers and foggers. There's also a range of fluids and consumables specially designed to get the best from the range.

#### Control Gear:

Lightweight and portable, Lanta Control Gear is robust enough to survive life on the road and smart enough to control DMX kit whatever the venue.

Our website can be found at [www.lantalighting.com](http://www.lantalighting.com) and is available for the benefit of customers worldwide. Please consult for information, advice and support on this and other high quality products from Lanta

### UNPACKING & INSPECTION

It is important that you carefully examine the packaging to ensure the product has not been damaged during shipping. If you are satisfied the packaging appears undamaged, carefully unpack the product. Please keep all of the packing materials in case you need to transport the device, pass it on to a new owner in the future or return it for some reason. Please examine the product and accessories to ensure they have arrived with you in good condition and show no sign of damage. If you suspect the product may be damaged, **DO NOT USE IT**. Please notify the sender immediately for advice – not the manufacturer.

### SAFETY INFORMATION


All information regarding important safety information about the installation, operation and maintenance of this product can be found at the back of this handbook. Products from Lanta Lighting meet all required safety standards in force at the time of manufacture and are fully compliant with them.

### MANUFACTURER WARRANTY

- This Manufacturer Warranty is valid in the UK only.
- Lanta Lighting warrants that this product is free from workmanship defects and material failure during normal use and operation for a period of 12 months from first use or from original date of sale (whichever is the earliest) providing all of the terms indicated in the warranty section have been fully complied with.
- Expressly excluded is our liability for any directly connected or indirectly connected item or items or any consequential loss associated with the failure of the product howsoever caused.
- If the product has been opened, modified, tampered with, incorrectly connected, used inappropriately or in conflict with the instructions herein, or the product model or serial number has been damaged, removed, tampered with, obliterated or made partly unreadable by any person or persons, the Manufacturer Warranty is irrevocably null and void.
- No extension, adaption, alteration or modification to the terms of this Manufacturer Warranty will be permitted, unless expressly authorised in writing (excluding email and fax) by a Director of Lanta Lighting. Warranty is transferrable during the Warranty period.

### OPERATING MODES

There are distinct operating modes that are supported by this unit. To select, use the "MENU" button to enter the menu. The "UP" and "DOWN" buttons steps through specific settings for each operating mode and the "ENTER" buttons chooses from the values available.



### SHOW PROGRAMS



With the LED display is reading "SHOW MODE", Choose between 2 built-in programmes. Use the "UP" and "DOWN" buttons step between "SHOW MODE 1" & "SHOW MODE2".

### SLAVE MODE



With the LED display is reading "SLAVE MODE" means the fixture is in slave mode and will mimic the 'Master' fixture, when connected through a DMX cable.

### MANUAL CONTROL



Within this mode, you can manually adjust the fixture. When the LED display is reading any of the following, Use the "UP" and "DOWN" buttons steps through specific values for each section between '000 - 255'.

LED Display Shows	Value	Effect
PAN	000 - 127	360° ADJUSTMENT
	128-191	PAN CLOCKWISE
	192-255	PAN ANTI - CLOCKWISE
TILT	000 - 127	360° ADJUSTMENT
	128-191	TILT CLOCKWISE
	192-255	TILT ANTI - CLOCKWISE
RED	000 - 255	RED
GREEN	000 - 255	GREEN
BLUE	000 - 255	BLUE
WHITE	000 - 255	WHITE

### RESET



Within this mode, you can reset all the manual control features back to "000" and take this fixture back to its original dormant state.

### LED DISPLAY



Within this mode, you can adjust the LED display brightness between "00" and "10" or if you wish the back light to be ON or OFF.

### PAN & TILT INVERSE



With the LED display is reading either "PAN" or "TILT" Inverse, Use the "UP" and "DOWN" buttons to select [YES] or [NO] to invert that rotation.

### CPU VERSION



Within this mode, you can what version of CPU this fixture is running.

### FACTORY SETTINGS



Here you can restore this fixture to factory settings.

### SOUND STATE



With the LED display is reading "SOUND STATE", you can turn the sound activated mode ON or OFF. Also when the display reads "Sose" you can adjust the sensitivity between "000" and "255".

### DMX ADDRESS



With the LED display is reading "DMX ADDRESS" the required address can be chosen. Use the "UP" and "DOWN" buttons step between "001" & "512" for the DMX address you require.

### DMX CHANNELS



With the LED display is reading "CHANNEL MODE" the DMX channels can be chosen. Use the "UP" and "DOWN" buttons step between the different channels available.

LED Display Shows	DMX Control Mode
9CH	9 CHANNEL
19CH	19 CHANNEL

### AUTO TEST



This mode will run the fixture through a series of LED tests, rotations which can highlight if any of the LEDs or rotations are not functioning properly.

## DMX CHANNELS

The following tables show the values on each of the available DMX Channels.

### 9CH

CHANNEL	VALUE	FUNCTION
CH1	0-127	360° PAN ADJUSTMENT
	128-191	PAN CLOCKWISE
	192-255	PAN ANTI- CLOCKWISE
CH2	0-127	360° TILT ADJUSTMENT
	128-191	TILT CLOCKWISE
	192-255	TILT ANTI- CLOCKWISE
CH3	0-255	DIMMING
CH4	0-255	RED
CH5	0-255	GREEN
CH6	0-255	BLUE
CH7	0-255	WHITE
CH8	0-5	NO FUNCTION
	6-255	STROBE
CH9	0-9	NO FUNCTION
	10-20	RESTORE
	21-255	NO FUNCTION

### 19CH

CHANNEL	VALUE	FUNCTION
CH1	0-255	PAN ADJUSTMENT
CH2	0-255	PAN FINE ADJUSTMENT
CH3	0-255	TILT ADJUSTMENT
CH4	0-255	TILT FINE ADJUSTMENT
CH5	0-255	PAN & TILT SPEED (FAST TO SLOW)
CH6	0-127	NO FUNCTION
	128-191	PAN CLOCKWISE (FAST TO SLOW)
	192-255	PAN ANTI - CLOCKWISE (SLOW TO FAST)
CH7	0-127	NO FUNCTION
	128-191	TILT CLOCKWISE (FAST TO SLOW)
	192-255	TILT ANTI - CLOCKWISE (SLOW TO FAST)
CH8	0-255	RED 1
CH9	0-255	GREEN 1
CH10	0-255	BLUE 1
CH11	0-255	WHITE 1
CH12	0-255	RED 2
CH13	0-255	GREEN 2
CH14	0-255	BLUE 2
CH15	0-255	WHITE 2
CH16	0-5	NO FUNCTION
	6-255	STROBE
CH17	0-15	NO EFFECT
	16-55	COLOUR RUNNING 1
	56-95	COLOUR RUNNING 2
	96-135	COLOUR RUNNING 3
	136-175	COLOUR RUNNING 4
	176-215	COLOUR RUNNING 5
	216-255	COLOUR RUNNING 6
CH18	0-255	COLOUR RUNNING SPEED
CH19	0-9	NO FUNCTION
	10-20	RESTORE
	21-255	NO FUNCTION

Lanta lighting is very focussed on saving the planet. Our products are low energy and our packaging is reduced to the minimum possible. We include our handbooks and specification sheets as part of our paper reduction programme. All our product handbooks and spec sheets are available on-line.

In this way you always get the latest version, available on any internet enabled device, at any time of the day or night, anywhere on the planet!



[www.lantalighting.com](http://www.lantalighting.com)